


Sensor-switched LED floodlight

# XLED slim

white

EAN 4007841 012069



LED

30 years (Ø 4,5h / day)



4000K neutral white



infrared sensor 160°



max. 8 m



IP44



2 - 1000 lux



2 sec - 70 min



ideal 2 m



energy saving

3 JAHRE HERSTELLER GARANTIE

steinel.de/garantie  
manufacturer's warranty  
steinel.de/garantie

## Function description

Light meets elegance. Elegantly designed sensor LED floodlight XLED slim with 10,5 W, ideal for building entrances and pathways, pleasant and effective light (660 lm) requiring very little energy, sensor reach of up to 8 m, tilting range of  $\pm 30^\circ$  (horizontal).

## Technical specifications

Dimensions (L x W x H)	201 x 66 x 241 mm
Mains power supply	230 – 240 V / 50 – 60 Hz
Mounting height max.	4,00 m
Sensor Technology	passive infrared
Output	10,5 W
Interconnection	No
Luminous flux	660 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Active and Passive Thermo Control
With motion detector	Yes
Detection angle	160 °

Sneak-by guard	Yes
Reach, radial	r = 4 m (22 m <sup>2</sup> )
Reach, tangential	r = 8 m (89 m <sup>2</sup> )
Photo-cell controller	Yes
Time setting	2 s – 70 Min.
Basic light level function	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Housing material	Aluminium
Cover material	Plastic, transparent
Manufacturer's Warranty	3 years
PU1, net weight	0,549 kg
Version	white
PU1, EAN	4007841012069

<https://www.steinel.de>

Subject to technical modifications

10.2020 Page 1 from 2

Sensor-switched LED floodlight


# XLED slim

white

EAN 4007841 012069



## Detection Zone

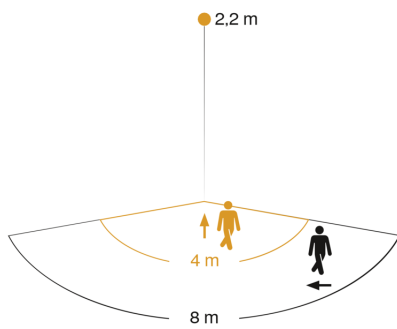

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

